


Connecting a Morley PanelProx to Net2

Overview

The output from the Morley PanelProx reader is 26 bit Wiegand as standard.

The PanelProx uses the HID 125 kHz OEM module and therefore reads compatible HID tokens.

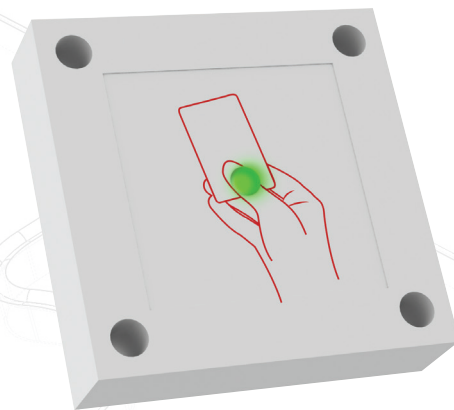

Cable Pinout	ACU terminal
Red	+12V
-	Red LED
-	Amber LED
Orange	Green LED
Green	Wiegand D0
White	Wiegand D1
-	NOT USED
Black & Screen	0V

10	Red 12V dc	Reader 1
10	Red LED	
10	Amber LED	
10	Green LED	
10	Data/D0	
10	Clock/D1	
10	Media Detect	
10	0V out	

Ensure any unused wires are safely terminated.

To configure the LED setting, open the Net2 server configuration utility and on the 'General' tab, check the 'Display reader LED's in OEM style' box.

If the option is not available, please contact Technical support for further advice.



+44 (0)1273 811011
support@paxton.co.uk
paxton.support



+49 (0) 251 2080 6900
support@paxton-gmbh.de
paxton.gmbh.support



+33 (0)157 329356
support@paxtonaccess.fr
paxton.support



+32 (0)78485147
support@paxton-benelux.com
paxton.benelux.support



+31 (0)76 3333 999
support@paxton-benelux.com
paxton.benelux.support



+27 (0)21 4276691
support@paxtonaccess.co.za
paxton.support



+1 (800) 672-7298
supportUS@paxton-access.com
usapaxton.support



+11 5715088198
soporte@paxton-access.com
paxton.soporte



+1 (864) 751-3501
soporte@paxton-access.com
paxton.soporte



8000 3570 3783
support@paxtonaccess.ae
paxton.support



+44 (0)1273 811011
support@paxton.co.uk
paxton.support