

# Connecting an Indala Flexpass Reader to Net2


## Overview

HID Indala produce a wide range of Flexpass readers. They are capable of outputting in either Wiegand or mag stripe (Clock and Data) format.

FlexSmart Arch and Wave readers mount on any North American standard electrical gang box or any flat surface.

Further information is available at:

[http://www.hidglobal.com/technology.php?tech\\_cat=8&subcat\\_id=10](http://www.hidglobal.com/technology.php?tech_cat=8&subcat_id=10)

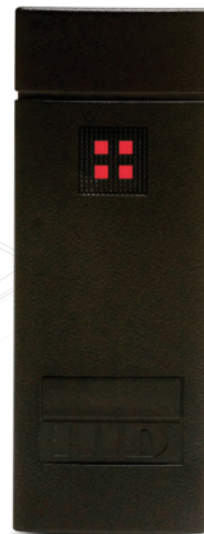

| Cable           | Cable | ACU terminal |
|-----------------|-------|--------------|
| +12V DC         | Red   | +12V         |
| -               | -     | Red LED      |
| -               | -     | Amber LED    |
| Green LED       | Brown | Green LED    |
| Wiegand - Out 0 | Green | Wiegand D0   |
| Wiegand - Out 1 | White | Wiegand D1   |
| -               | -     | NOT USED     |
| 0V/Screen       | Black | 0V           |

|    |              |          |
|----|--------------|----------|
| IO | Red 12V dc   | Reader 1 |
| IO | Red LED      |          |
| IO | Amber LED    |          |
| IO | Green LED    |          |
| IO | Data/D0      |          |
| IO | Clock/D1     |          |
| IO | Media Detect |          |
| IO | 0V out       |          |

Ensure any unused wires are safely terminated.

To configure the LED setting, open the Net2 server configuration utility and on the 'General' tab, check the 'Display reader LED's in OEM style' box.

If the option is not available, please contact Technical support for further advice.



+44 (0)1273 811011  
support@paxton.co.uk  
paxton.support



+49 (0) 251 2080 6900  
support@paxton-gmbh.de  
paxton.gmbh.support



+33 (0)157 329356  
support@paxtonaccess.fr  
paxton.support



+32 (0)78485147  
support@paxton-benelux.com  
paxton.benelux.support



+31 (0)76 3333 999  
support@paxton-benelux.com  
paxton.benelux.support



+27 (0)21 4276691  
support@paxtonaccess.co.za  
paxton.support



+1 (800) 672-7298  
supportUS@paxton-access.com  
usapaxton.support



+11 5715088198  
soporte@paxton-access.com  
paxton.soporte



+1 (864) 751-3501  
soporte@paxton-access.com  
paxton.soporte



8000 3570 3783  
support@paxtonaccess.ae  
paxton.support



+44 (0)1273 811011  
support@paxton.co.uk  
paxton.support